

TEKNİK ÖZELLİKLER / SPECIFICATIONS

ÖLÇÜ / SIZE : AISI 316/304: DN15 → DN100 · GGG40.3:
DN15 → DN250

BASINÇ SINIFI / PRESSURE CLASS : PN16–PN40

ÇALIŞMA SICAKLIĞI / WORKING TEMPERATURE :
PTFE -196...+260 · Dolgulu PTFE -196...+260 °C

STANDARTLAR / STANDARDS

NORM / NORM : DIN

TASARIM / DESIGN : ISO 17292 - EN 3148

ALINDAN ALINA / FACE TO FACE : EN 558 Seri 14-15

TEPE FLANŞI / TOP FLANGE : ISO 5211

TEST / TEST : TS EN 12266-1

UYGULAMALAR / APPLICATIONS

BUHAR, GAZ VE GENEL SIVILAR

VAPORS, GAS AND GENERAL LIQUIDS


En doğru tercih için vana seçim kılavuzunu incelemeniz önerilir.

Check out our valve selection guide for the best choice.



Ürün sayfası için taratın

Scan for product page

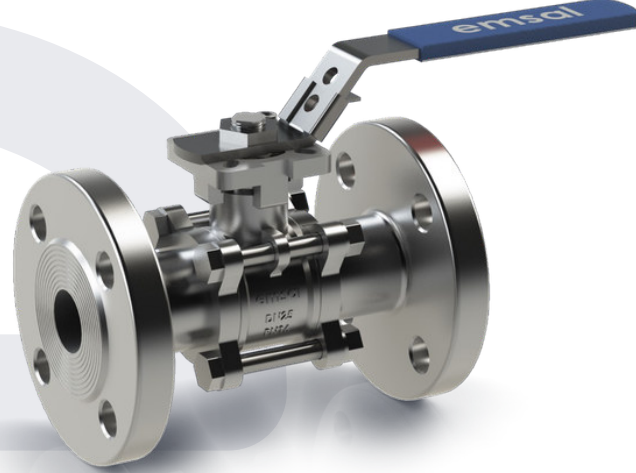

MATERYALLER / MATERIALS

GÖVDE / BODY



AISI 316 / AISI 304



GGG40.3

KÜRE / BALL



AISI 316 / AISI 304


CONTA / SEAT



PTFE



PTFE C25

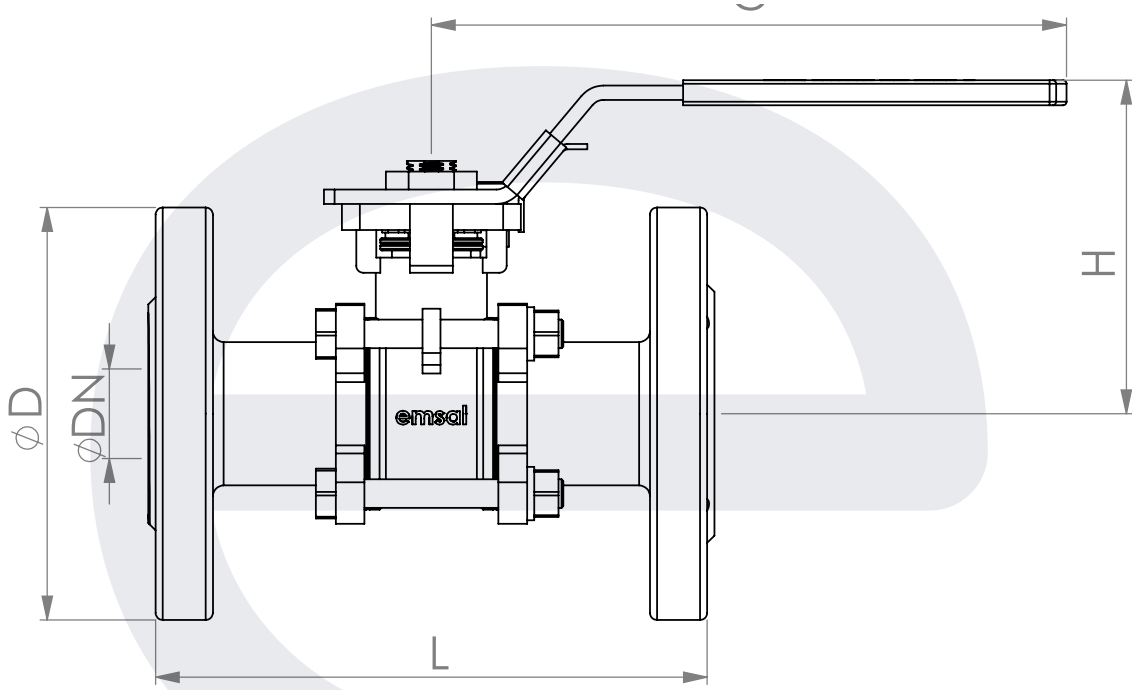

ÖLÇÜLER / DIMENSIONS

DN	15	20	25	32	40	50	65	80	100	125	150	200	250
D PN16	95	105	115	140	150	165	185	200	220	250	285	340	405
D PN25	95	105	115	140	150	165	185	200	235	270	300	360	425
D PN40	95	105	115	140	150	165	185	200	235	270	300	360	425
L	130	150	160	180	200	230	290	310	350	400	450	550	650
G	150	150	180	230	275	275	320	380	450	450	650	900	1100
H	75	83	90	95	115	120	135	150	170	200	235	270	370

Tüm ölçüler mm'dir. / All dimensions are in mm.

PARÇA LİSTESİ / PART LIST

PARÇA AÇIKLAMASI PART DESCRIPTION	MATERYAL MATERIAL	PARÇA AÇIKLAMASI PART DESCRIPTION	MATERYAL MATERIAL
GÖVDE / BODY	AISI 316 / AISI 304 / GGG40.3	CONTA / SEAT	PTFE / PTFE C25
KAPAK / CAP	AISI 316 / AISI 304 / GGG40.3	KOL / LEVER	AISI 304
KÜRE / BALL	AISI 316 / AISI 304	KİLİT / LOCK	AISI 304
MİL / STEM	AISI 316 / AISI 304	CIVATA / BOLT	AISI 304
MİL CONTASI / STEM SEAL	PTFE / PTFE C25	SOMUN / NUT	AISI 304