

YÜKSEK PERFORMANSLI KELEBEK VANA HIGH PERFORMANCE BUTTERFLY VALVE

112

TEKNİK ÖZELLİKLER / SPECIFICATIONS

ÖLÇÜ / SIZE : DN50 → DN600

BASINÇ SINIFI / PRESSURE CLASS : PN16–PN25

ÇALIŞMA SICAKLIĞI / WORKING TEMPERATURE : -40 →
+220 °C

TİP / TYPE : Çift eksantrik, lug tipi

GİRİŞ BASINCI / INLET PRESSURE : maks. 25 bar

STANDARTLAR / STANDARDS

NORM / NORM : DIN/JIS/ANSI

FLANŞ / FLANGE : EN 1092 PN10/16/25 · JIS 5K/10K/16K ·
ASME 125/150/300

TEST / TEST : TS EN 12266-1

UYGULAMALAR / APPLICATIONS

KİMYASALLAR, SICAK HAVA, SU

CHEMICALS, HOT AIR, WATER

En doğru tercih için vana seçim kılavuzunu incelemeniz önerilir.

Check out our valve selection guide for the best choice.



Ürün sayfası için taratın

Scan for product page



MATERYALLER / MATERIALS

GÖVDE / BODY




AISI 316

YÜKSEK PERFORMANSLI KELEBEK VANA HIGH PERFORMANCE BUTTERFLY VALVE



112

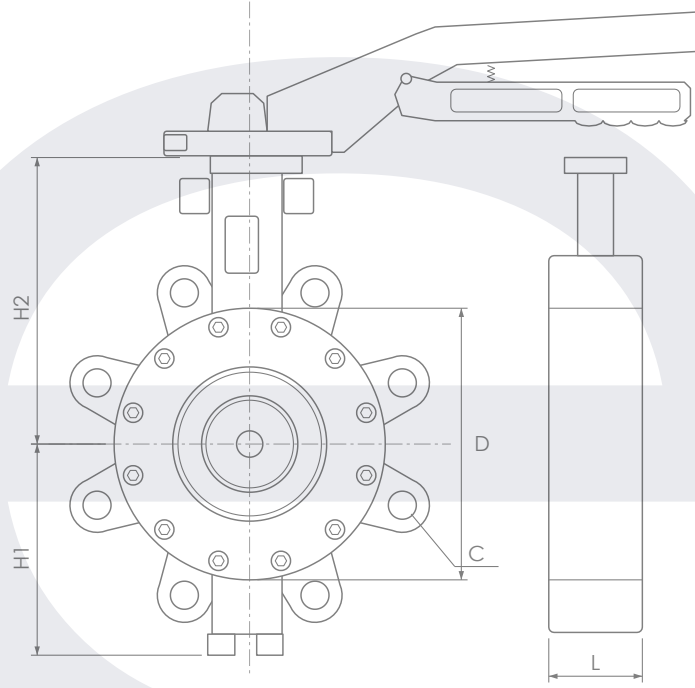

ÖLÇÜLER / DIMENSIONS

DN	50	65	80	100	125	150	200	250	300	350	400	450	500	600
L	43	49	49	54	56	56	64	71	78	92	102	114	127	154
D	96	119	132	156	186	216	264	320	381	413	470	533	580	688
H1	65	75	80	92	115	126	165	235	258	295	315	370	398	475
H2	138	148	168	180	202	225	265	315	342	375	410	442	458	558
C · 10K	120	140	150	175	210	240	290	355	432	455	510	565	620	730
C · PN16	125	145	160	180	210	240	295	355	410	470	525	585	650	770
C · 150LB	120,5	139,5	152,5	190,5	216	241,5	298,5	362	400	476	540	578	635	750
C · 300LB	127	149	168	200	235	270	330	388	451	515	572	629	686	813

Tüm ölçüler mm'dir. / All dimensions are in mm.

PARÇA LİSTESİ / PART LIST

PARÇA AÇIKLAMASI PART DESCRIPTION	MATERYAL MATERIAL	PARÇA AÇIKLAMASI PART DESCRIPTION	MATERYAL MATERIAL
GÖVDE / BODY	AISI 316	MİL / STEM	17-4PH
KLAPE / DISC	AISI 316	MİL CONTASI / STEM SEAL	PTFE