

TEKNİK ÖZELLİKLER / SPECIFICATIONS

ÖLÇÜ / SIZE : DN25 → DN200

BASINÇ SINIFI / PRESSURE CLASS : PN16

ÇALIŞMA SICAKLIĞI / WORKING TEMPERATURE : GG25 /

GGG40.3: -10 → +180 °C · Rg5: -10 → +350 °C

TİP / TYPE : Açılı, tam kalkışlı, yaylı

AYAR BASINCI / SET PRESSURE : 0,5–14 bar (GG25 /

GGG40.3) · 0,2–16 bar (Rg5)

STANDARTLAR / STANDARDS

NORM / NORM : DIN/JIS

FLANŞ / FLANGE : EN 1092-1 / ISO 7005-1

TEST / TEST : TS EN 12266-1

UYGULAMALAR / APPLICATIONS

BUHAR, GAZLAR, SIVILAR

STEAM, GASES, LIQUIDS

En doğru tercih için vana seçim kılavuzunu incelemeniz önerilir.

Check out our valve selection guide for the best choice.



Ürün sayfası için taratın

Scan for product page



MATERYALLER / MATERIALS

GÖVDE / BODY




GG25 / GGG40.3



Rg5



AISI 304

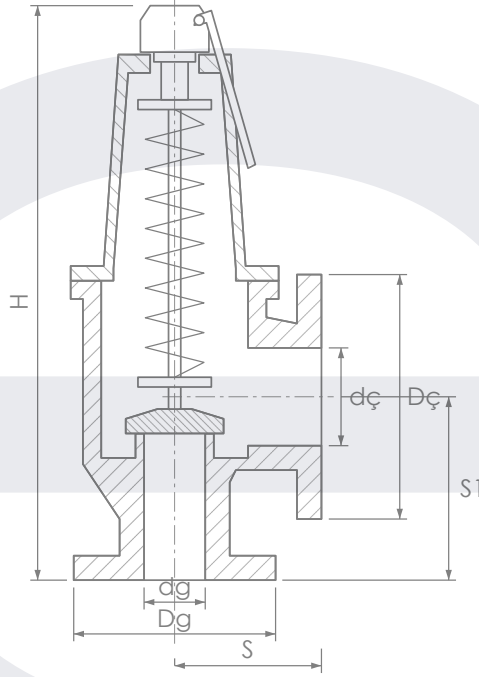

ÖLÇÜLER / DIMENSIONS

DN	25x40	32x50	40x65	50x80	65x100	80x125	100x150	125x175	150x200
H	410	435	470	490	580	755	860		
S1	105	115	140	150	170	195	220		
S	100	110	115	120	140	160	180		
dg	25	32	40	50	65	80	100	125	150
Dg	115	140	150	165	185	200	220	250	285
dç	40	50	65	80	100	125	150		
Dç	150	165	185	200	220	250	285		

Tüm ölçüler mm'dir. / All dimensions are in mm.

PARÇA LİSTESİ / PART LIST

PARÇA AÇIKLAMASI PART DESCRIPTION	MATERYAL MATERIAL	PARÇA AÇIKLAMASI PART DESCRIPTION	MATERYAL MATERIAL
GÖVDE / BODY	AISI 304 / Rg5 / GGG40 / GG25 / GGG40.3	YAY / SPRING	Çelik
KAPAK / BONNET	GG25 / GGG40.3 / Rg5	CONTA / SEAT	Metal
KLAPE / DISC	Paslanmaz çelik	KOL / LEVER	Çelik
MİL / STEM	Paslanmaz çelik		