

FLANŞLI Y TİPİ PİSLİK TUTUCU Y TYPE FLANGED STRAINER



030

TEKNİK ÖZELLİKLER / SPECIFICATIONS

ÖLÇÜ / SIZE : DN15 → DN500

BASINÇ SINIFI / PRESSURE CLASS : PN10-PN40

ÇALIŞMA SICAKLIĞI / WORKING TEMPERATURE : -30 →
+120 °C

STANDARTLAR / STANDARDS

NORM / NORM : DIN/ANSI

FLANŞ / FLANGE : EN 1092-2 / ISO 7005-2

ALINDAN ALINA / FACE TO FACE : EN 558-1 / DIN 3202 F1

TEST / TEST : TS 11494 / EN 12266-1

UYGULAMALAR / APPLICATIONS

SU, YAĞ, BUHAR, YANICI OLMAYAN GAZLAR VE HAVA
WATER, OIL, STEAM, NON-FLAMMABLE GASES AND AIR

En doğru tercih için vana seçim kılavuzunu incelemeniz önerilir.
Check out our valve selection guide for the best choice.



Ürün sayfası için taratın
Scan for product page



MATERYALLER / MATERIALS

GÖVDE / BODY



AISI 316 / AISI 304



Rg5



St37



GG25 / GGG40.3

ELEK / SCREEN



AISI 316 / AISI 304

CONTA / SEAT



NBR / EPDM




FKM (Viton)

FLANŞLI Y TİPİ PİSLİK TUTUCU

Y TYPE FLANGED STRAINER



030

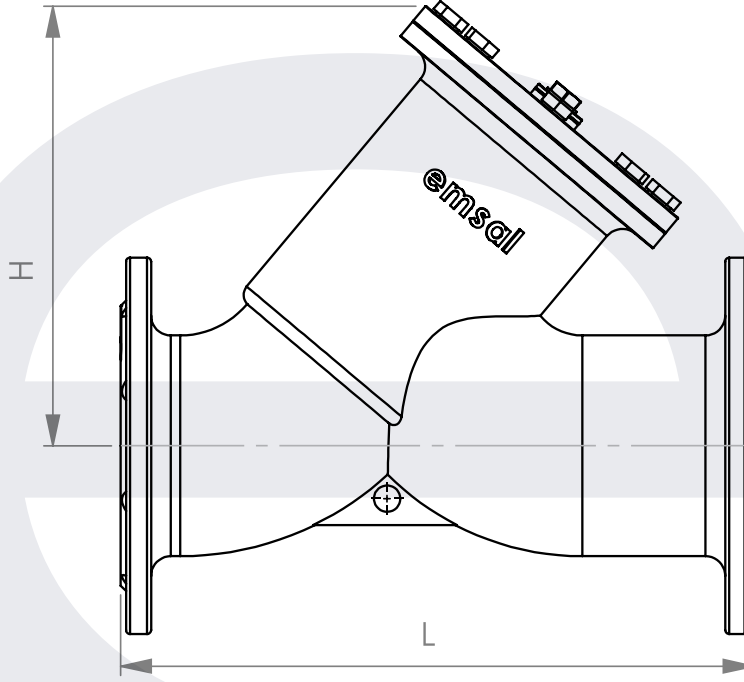

ÖLÇÜLER / DIMENSIONS

DN	15	20	25	32	40	50	65	80	100	125	150	200	250	300	350	400	500
L	130	150	160	180	200	230	290	310	350	400	480	600	730	850	980	1100	1250
H	51	57	66	78	88	104	185	205	260	315	390	510	630	735	825	925	1050

Tüm ölçüler mm'dir. / All dimensions are in mm.

PARÇA LİSTESİ / PART LIST

PARÇA AÇIKLAMASI PART DESCRIPTION	MATERYAL MATERIAL	PARÇA AÇIKLAMASI PART DESCRIPTION	MATERYAL MATERIAL
GÖVDE / BODY	AISI 316 / AISI 304 / Rg5 / St37 / GGG40.3	CIVATA / BOLT	AISI 316 / AISI 304
KAPAK / CAP	AISI 316 / AISI 304 / Rg5 / St37 / GGG40.3	SOMUN / NUT	AISI 316 / AISI 304
ELEK / SCREEN	AISI 316 / AISI 304	TAPA / DRAIN PLUG	AISI 304 / St37
CONTA / SEAT	NBR / EPDM / FKM (Viton)	MAPA / EYE BOLT	AISI 304 / St37