

TEPE FLANŞLI DİŞLİ TİP 3 YOLLU KÜRESEL VANA THREADED TYPE 3-WAY BALL VALVE WITH TOP FLANGE

076

TEKNİK ÖZELLİKLER / SPECIFICATIONS

ÖLÇÜ / SIZE : DN8 → DN50

BASINÇ SINIFI / PRESSURE CLASS : PN63

ÇALIŞMA SICAKLIĞI / WORKING TEMPERATURE : -40 →
+230 °C

STANDARTLAR / STANDARDS

NORM / NORM : DIN

BAĞLANTI / CONNECTION : BSPP dişi dişi · DIN 2999 / ISO
228-1

ALINDAN ALINA / FACE TO FACE : EN 558 Seri 1 (DIN 3202
M3)

TEPE FLANŞI / TOP FLANGE : ISO 5211

TEST / TEST : TS EN 12266-1

UYGULAMALAR / APPLICATIONS

AKIŞ YÖNLENDİRME VE KARIŞTIRMA, SU, BASINÇLI HAVA,
AŞINDIRICI OLMAYAN SIVILAR

FLOW DIVERTING AND MIXING, WATER, COMPRESSED AIR,
NON-CORROSIVE LIQUIDS

En doğru tercih için vana seçim kılavuzunu incelemeniz önerilir.

Check out our valve selection guide for the best choice.



Ürün sayfası için taratın

Scan for product page



MATERYALLER / MATERIALS

GÖVDE / BODY



AISI 316

KÜRE / BALL


CONTA / SEAT

TEPE FLANŞLI DİŞLİ TİP 3 YOLLU KÜRESEL VANA

THREADED TYPE 3-WAY BALL VALVE WITH TOP FLANGE



076

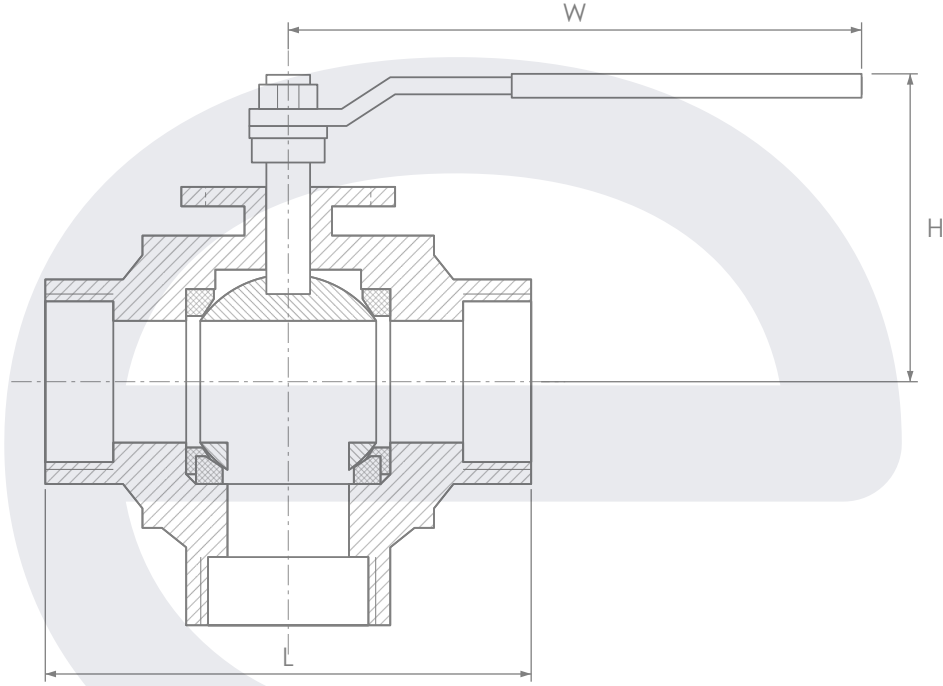

ÖLÇÜLER / DIMENSIONS

DN	8	10	15	20	25	32	40	50
L	72	72	72	83	101	118	125	149
H	75	75	75	75	101	118	125	149
W	101	101	101	124	124	152	152	190

Tüm ölçüler mm'dir. / All dimensions are in mm.

PARÇA LİSTESİ / PART LIST

PARÇA AÇIKLAMASI PART DESCRIPTION	MATERYAL MATERIAL	PARÇA AÇIKLAMASI PART DESCRIPTION	MATERYAL MATERIAL
GÖVDE / BODY	AISI 316 / AISI 304	O-RİNG / O-RING	PTFE C25
KAPAK / CAP	AISI 316	CONTA / SEAT	PTFE C25
KÜRE / BALL	AISI 316	KOL / LEVER	AISI 304
MİL / STEM	AISI 316	SOMUN / NUT	AISI 304