

TEKNİK ÖZELLİKLER / SPECIFICATIONS

ÖLÇÜ / SIZE : DN15 → DN100

BASINÇ SINIFI / PRESSURE CLASS : PN10–PN16

ÇALIŞMA SICAKLIĞI / WORKING TEMPERATURE : -40 →
+230 °C

STANDARTLAR / STANDARDS

NORM / NORM : DIN

TASARIM / DESIGN : EN 12516

FLANŞ / FLANGE : EN 1092-1 · flanşlar arası

TEPE FLANŞI / TOP FLANGE : ISO 5211

TEST / TEST : TS EN 12266-1

UYGULAMALAR / APPLICATIONS

SICAK VE SOĞUK SU, BASINÇLI HAVA, ASİDİK VE ALKALİ
OLMAYAN SIVILAR

HOT AND COLD WATER, COMPRESSED AIR, NON-ACIDIC
AND NON-ALKALINE LIQUIDS

En doğru tercih için vana seçim kılavuzunu incelemeniz önerilir.

Check out our valve selection guide for the best choice.



Ürün sayfası için taratın

Scan for product page



MATERYALLER / MATERIALS

GÖVDE / BODY




AISI 316



Rg5

KÜRE / BALL




AISI 316

CONTA / SEAT



PTFE C25

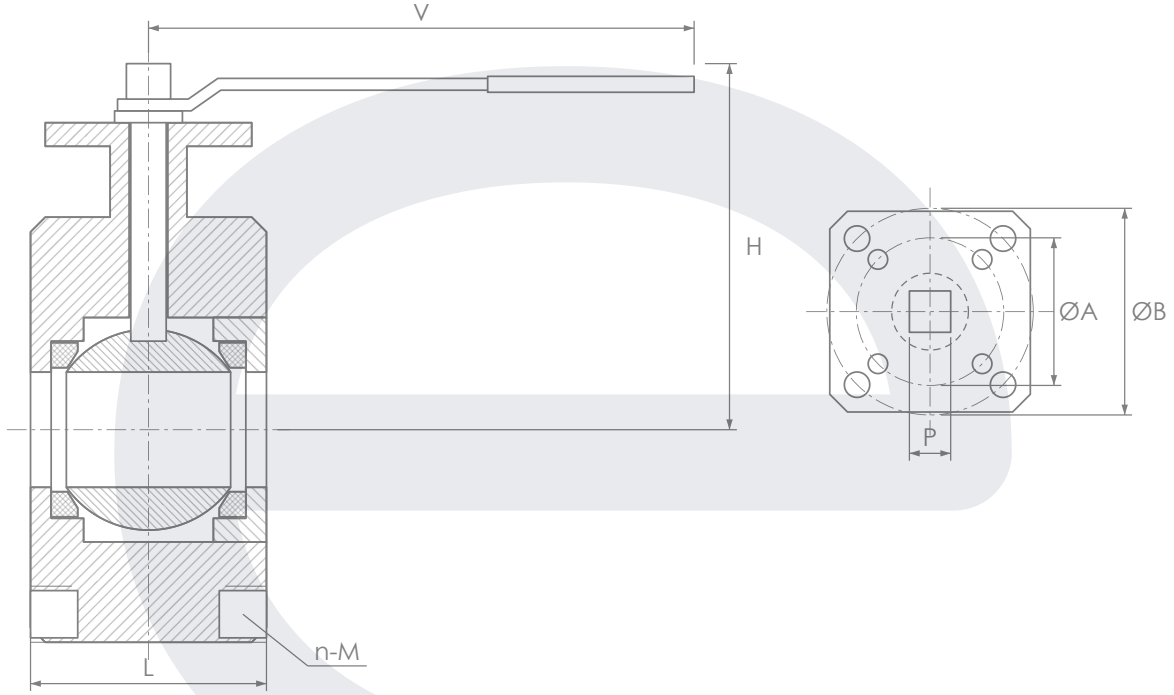

ÖLÇÜLER / DIMENSIONS

DN	15	20	25	32	40	50	65	80	100
L · AISI 316	42	44	50	60	65	80	110	120	150
L · Rg5	37	40	43	51	63	81	101	118	150
V	140	140	160	160	185	185	230	230	210
H	81	86	99	109	116	124	148	157	189
ØA	36	36	42	42	50	50	70	70	102
ØB	42	42	50	50	70	70	102	102	102
P	9	9	11	11	14	14	17	17	22
M	M12	M12	M12	M16	M16	M16	M16	M16	M16
n	4	4	4	4	4	4	4	8	8

Tüm ölçüler mm'dir. / All dimensions are in mm.

PARÇA LİSTESİ / PART LIST

PARÇA AÇIKLAMASI PART DESCRIPTION	MATERYAL MATERIAL	PARÇA AÇIKLAMASI PART DESCRIPTION	MATERYAL MATERIAL
GÖVDE / BODY	AISI 316 / AISI 304 / Rg5	CONTA / SEAT	PTFE C25
KAPAK / CAP	AISI 316 / Rg5	KOL / LEVER	AISI 304
KÜRE / BALL	AISI 316	KİLİT / LOCK	AISI 304
MİL / STEM	AISI 304	CIVATA / BOLT	AISI 304
MİL CONTASI / STEM SEAL	PTFE	SOMUN / NUT	AISI 304
O-RİNG / O-RING	NBR / PTFE		