

TEKNİK ÖZELLİKLER / SPECIFICATIONS

ÖLÇÜ / SIZE : DN50 → DN600

BASINÇ SINIFI / PRESSURE CLASS : PN10–PN16

ÇALIŞMA SICAKLIĞI / WORKING TEMPERATURE : GGG40 /
AISI 304 / AISI 316: -30 → +90 °C · GGG50: maks. +50 °C

STANDARTLAR / STANDARDS

NORM / NORM : DIN

FLANŞ / FLANGE : EN 1092 · flanşlar arası

ALINDAN ALINA / FACE TO FACE : MSS SP-81 · EN 558 Seri
20

TEST / TEST : TS EN 12266-1

UYGULAMALAR / APPLICATIONS

ATIK SU, ÇAMUR VE LİFLİ AKIŞKANLAR, KÂĞIT VE MADEN
ENDÜSTRİSİ

WASTE WATER, SLURRY AND FIBROUS MEDIA, PULP, PAPER
AND MINING

En doğru tercih için vana seçim kılavuzunu incelemeniz önerilir.

Check out our valve selection guide for the best choice.



Ürün sayfası için taratın

Scan for product page



MATERYALLER / MATERIALS


GÖVDE / BODY



GGG40 / GGG50



AISI 304 / AISI 316

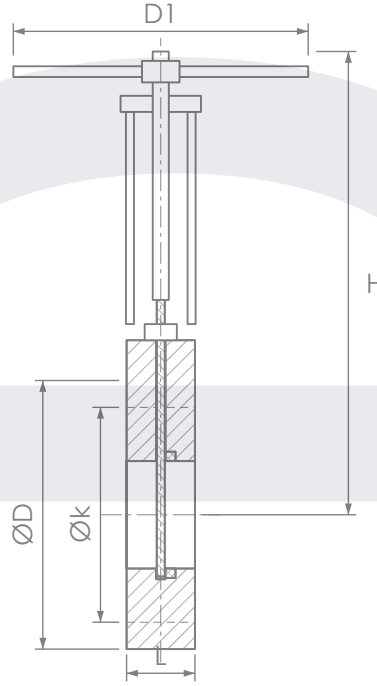

ÖLÇÜLER / DIMENSIONS

DN	50	65	80	100	125	150	200	250	300	350	400	450	500	600
GGG40 / AISI 304 / AISI 316														
L	48	48	51	51	57	57	70	70	76	76	89	89	114	114
H	290	330	358	378	428	490	588	690	815	890	980	1120	1400	1700
D1	180	180	220	240	240	280	300	320	320	400	450	530	600	600
ØD	165	185	200	220	250	285	340	395	445	505	565	615	670	780
Øk	125	145	160	180	210	240	295	350	400	460	515	565	620	725
GGG50 · yükselen mil														
Øk	125	145	160	180	210	240	295	350	400	460	515	565	620	725
L	43	46	46	52	56	56	60	68	78	78	102	106	110	110
H	380	430	480	510	580	670	815	1000	1150	1315	1500	1650	1900	2035
D1	180	180	200	200	220	250	300	320	350	440	500	600	800	500

Tüm ölçüler mm'dir. / All dimensions are in mm.

PARÇA LİSTESİ / PART LIST

PARÇA AÇIKLAMASI PART DESCRIPTION	MATERYAL MATERIAL	PARÇA AÇIKLAMASI PART DESCRIPTION	MATERYAL MATERIAL
GÖVDE / BODY	AISI 316 / AISI 304 / GGG40 / GGG40.3 / GGG50	MİL CONTASI / STEM SEAL	PTFE
KLAPE / DISC	AISI 304	CONTA / SEAT	NBR / EPDM
MİL / STEM	Paslanmaz çelik / AISI 420 / AISI 304		