

DIŞLI SÜRGÜLÜ VANA (ŞİBER) THREADED GATE VALVE

132

TEKNİK ÖZELLİKLER / SPECIFICATIONS

ÖLÇÜ / SIZE : DN15 → DN100

BASINÇ SINIFI / PRESSURE CLASS : PN16

ÇALIŞMA SICAKLIĞI / WORKING TEMPERATURE : AISI 316:

-10 → +160 °C · Rg5: -30 → +200 °C

STANDARTLAR / STANDARDS

NORM / NORM : DIN

BAĞLANTI / CONNECTION : BSP dişli dişli · EN 10226-1 (DIN 2999)

ALINDAN ALINA / FACE TO FACE : DIN 3202 M14

TEST / TEST : TS EN 12266-1

UYGULAMALAR / APPLICATIONS

SU, HAVA, AŞINDIRICI OLMAYAN AKIŞKANLAR

WATER, AIR, NON-CORROSIVE FLUIDS

En doğru tercih için vana seçim kılavuzunu incelemeniz önerilir.

Check out our valve selection guide for the best choice.



Ürün sayfası için taratın


Scan for product page

MATERYALLER / MATERIALS

GÖVDE / BODY



AISI 316




Rg5

CONTA / SEAT



PTFE

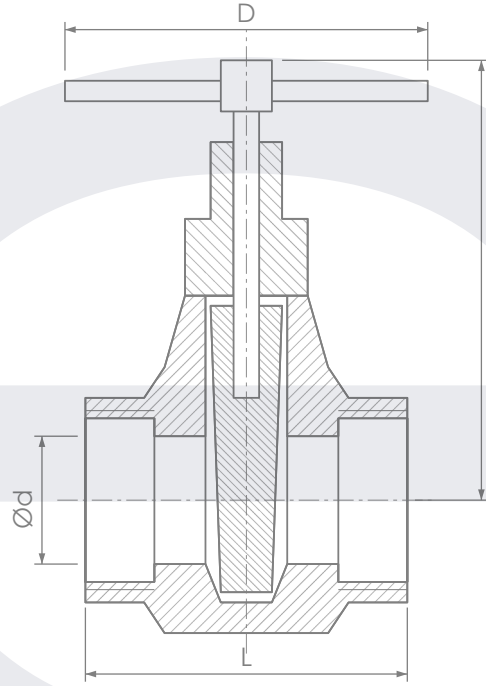

ÖLÇÜLER / DIMENSIONS

DN	15	20	25	32	40	50	65	80	100
AISI 316									
G	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"			
L	54	60	63	71	78	88			
H	95	105	115	130	145	160			
D	54	64	71	77	96	96			
Rg5									
L	43	49	54	62	65	75	87	105	124
D	52	60	60	70	78	92	100	110	130
H	76	92	103	116	133	156	190	215	258
Ød	13	19	25	32	38	50	63	76	100

Tüm ölçüler mm'dir. / All dimensions are in mm.

PARÇA LİSTESİ / PART LIST

PARÇA AÇIKLAMASI PART DESCRIPTION	MATERYAL MATERIAL	PARÇA AÇIKLAMASI PART DESCRIPTION	MATERYAL MATERIAL
GÖVDE / BODY	AISI 316 / Rg5	MİL / STEM	AISI 316 / MS 58
KAPAK / BONNET	AISI 316 / Rg5	MİL CONTASI / STEM SEAL	PTFE
KLAPE / DISC	AISI 316	CONTA / SEAT	PTFE